5S LINE

TUPAI®

PARTNER IN SMART SOLUTIONS

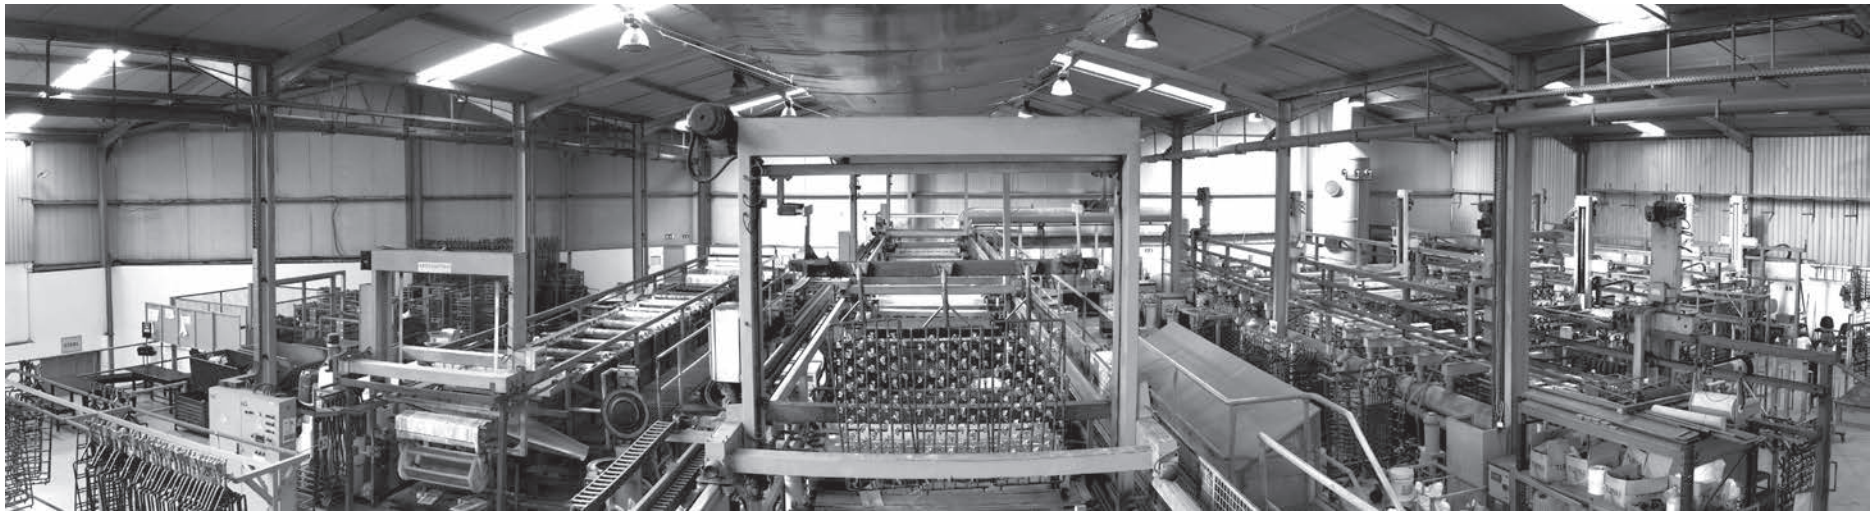

ACABAMENTOS / FINISHES

(03)
cromado brilhante
bright chrome

(96)
cromado satinado
satin chrome

(110)
satinado efeito inox
satin steel effect

(141)
titan
titan

(142)
niquelado pérola
nickel pearl

(152)
branco pérola
white pearl

(153)
preto pérola
black pearl

4140 5SQ

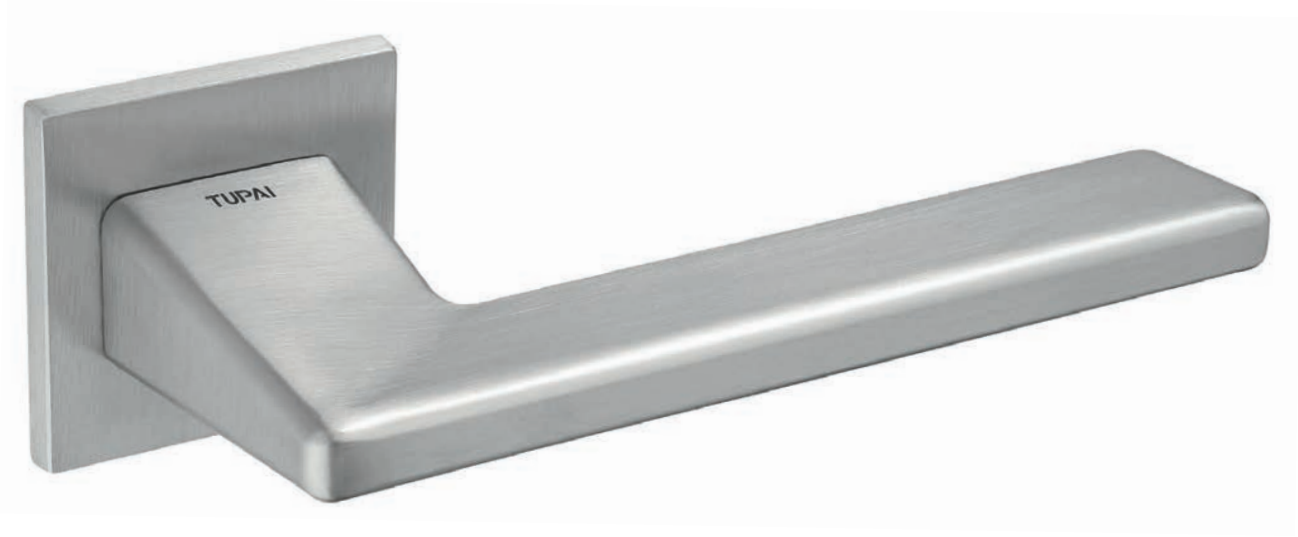

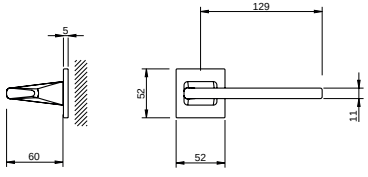

(03) (96) (141) (142) (152) (153)

2275 5SQ

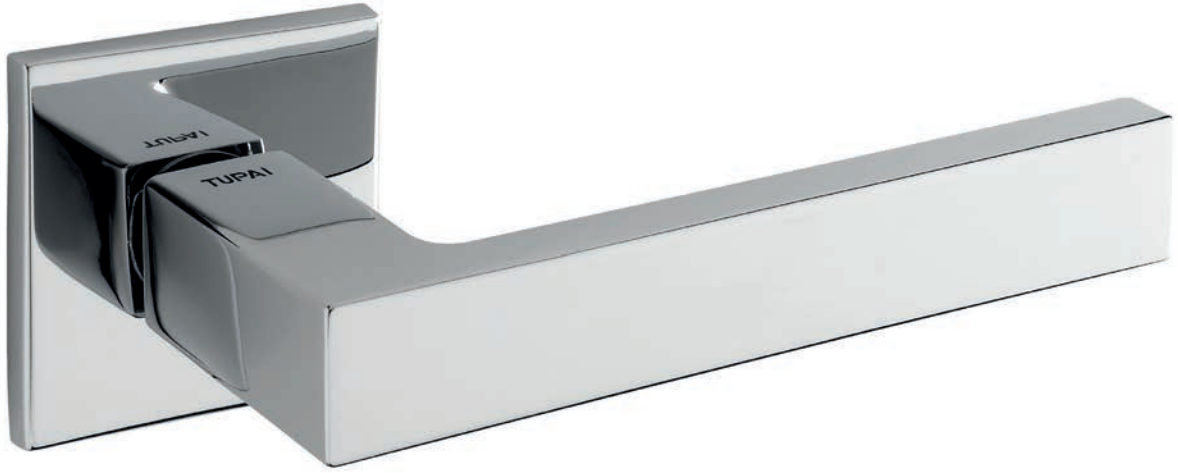

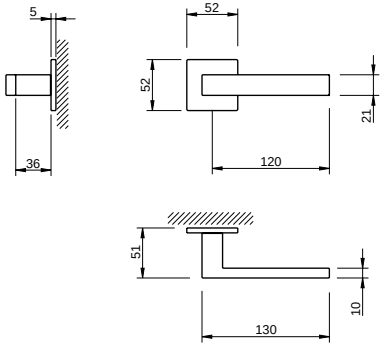

(03) (96) (110) (141) (142) (152) (153)

4152 5SQ

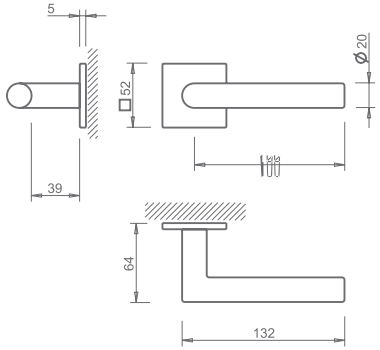

(03) (96) (141) (142) (152) (153)

4153 5SQ

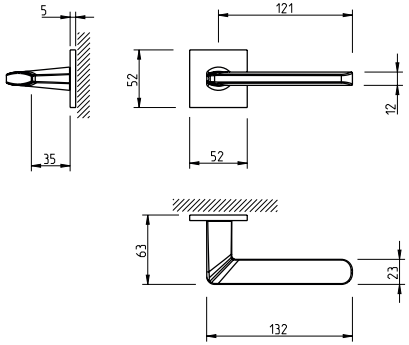

(03) (96) (141) (142) (152) (153)

3097 5SQ

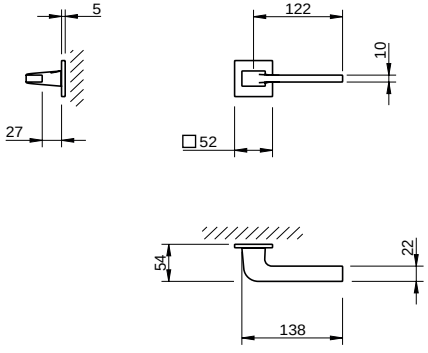

(03) (96) (141) (142) (152) (153)

3098 5SQ

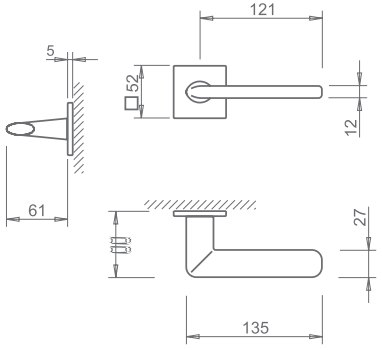

2730 5SQ

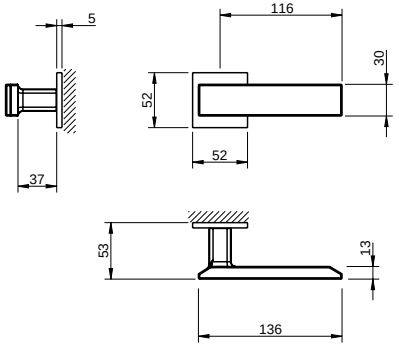

2732 5SQ





(03) (96) (141) (142) (152) (153)

1988 5SQ

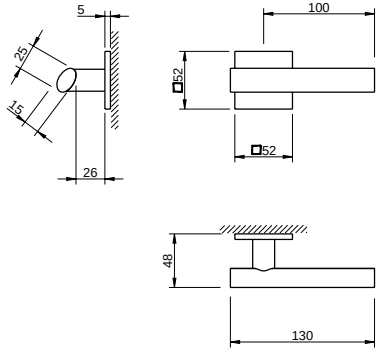

(96) (141) (142) (152) (153)

TUPAI

4152 5S

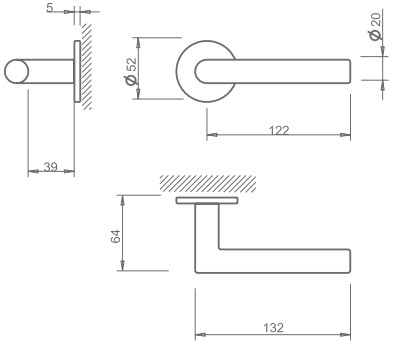

(03) (96) (141) (142) (152) (153)

4153 5S

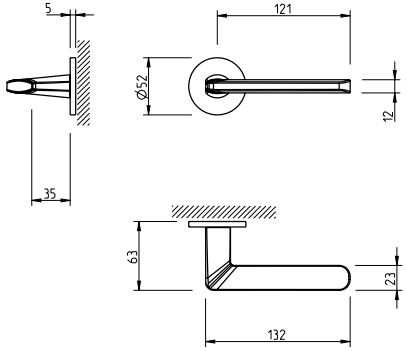

(03) (96) (141) (142) (152) (153)

3097 5S

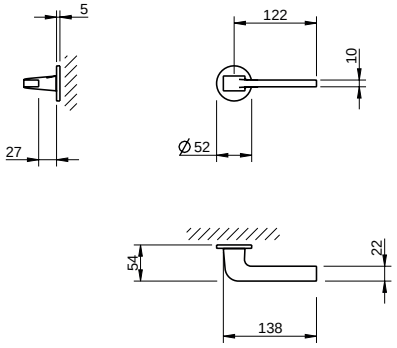

(03) (96) (141) (142) (152) (153)

3098 5S

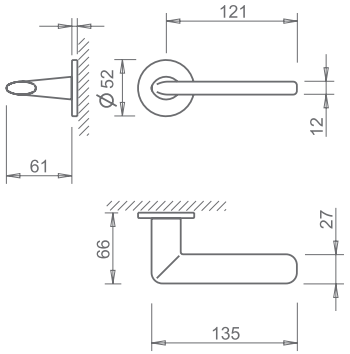

2732 5S





1988 5S

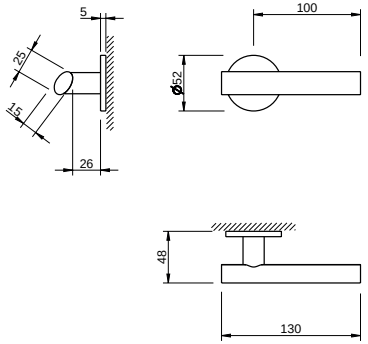

(96) (141) (142) (152) (153)

293 5S

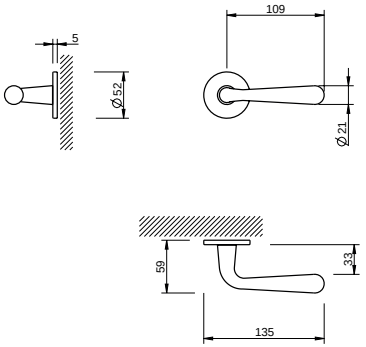

(03) (96) (141) (142) (152) (153)

294 5S

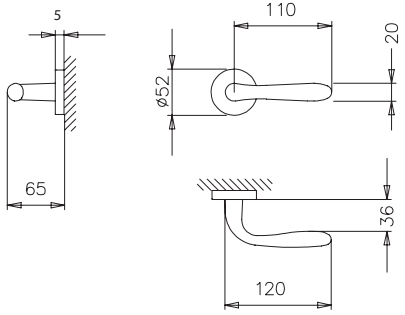

(03) (96) (141) (142) (152) (153)

4043 / 4048 / 4049 5SQ

(03) (96) (110) (141) (142) (152) (153)

4040 5SQ

683 5SQ Fixo / Fixed Knob

4060 / 4045 / 4046 5S

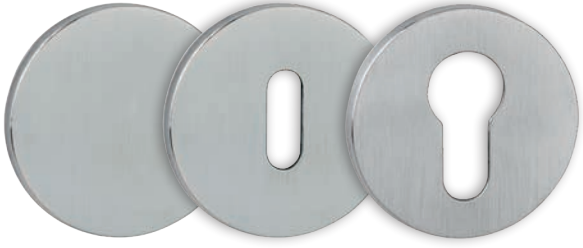

(03) (96) (141) (142) (152) (153)

4041 5S

683 5S Fixo / Fixed Knob

(03) (96) (141) (142) (152) (153)

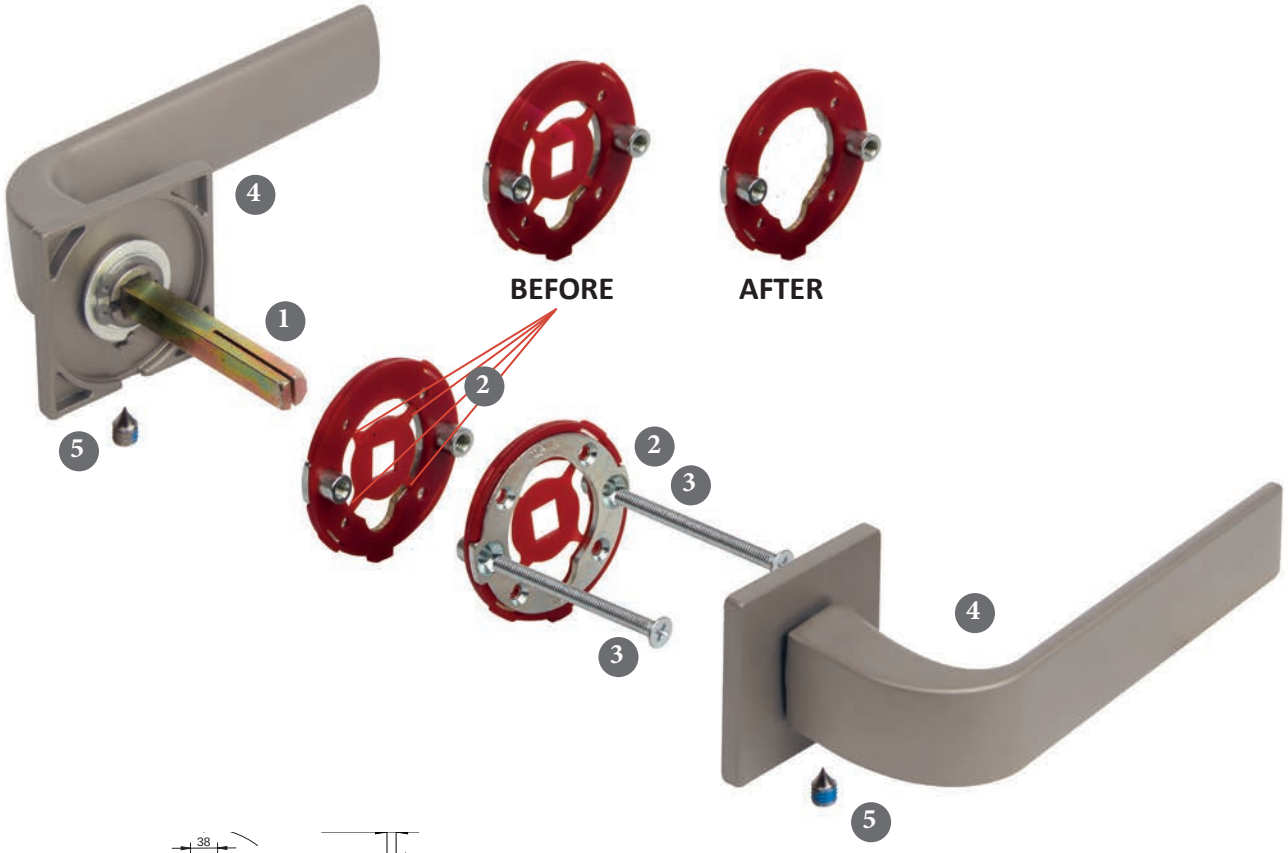

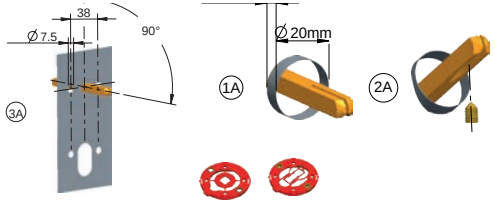

NOTA: Existe opção sem postes.
NOTE: With or without embedded fittings in the door.

VIDEO 5S Redondo / Round

VIDEO 5S Quadrado / Square

1 Colocar o ferro 8mm (1) na porta (com a ranhura mais larga virada para baixo) conforme fig. 2A
2 Colocar o adaptador (2) com parafusos passantes (3)
3 Partir e limpar o interior plástico quadrado nos dois adaptadores. O interior da peça plástica deve ser removido
4 Aplicar o puxador (4) com o espelho de baixo para cima, ajustar e pressionar de encontro com a porta fazendo o "CLIK"
5 Apertar os pernos roscado M6 de encontro ao ferro 8mm

1 Position the 8 mm square spindle (1) in the door (wider groove facing down) according fig. 2A
2 Fix the adapter plates (2) to the door with the passing/wooden screws (3)
3 Inserting the handle (4) and twisting, break the inside plastic part of the adapter plate. Don't forget to remove it afterwards
4 Adjust the handle rosette to the adapter with a bottom to top pushing movement until it "clicks"
5 Tighten the M6 threaded pins (5) on the handle against the square spindle

TUPAI®

RASO DE PAREDES AP. 3099
3754-901 ÁGUEDA, PORTUGAL
GPS N 40.585824 W 8.465514

TEL. +351 234 612 600
FAX +351 234 601 295

TUPAI@TUPAI.PT
WWW.TUPAI.PT

DMKT 2019

Cofinanciado por:
COMPETE 2020
PORTUGAL 2020
UNIÃO EUROPEIA
Fundo Europeu
de Desenvolvimento Regional